

Standing Seam Cladding and Roofing Data Sheet

The Standing Seam Cladding and Roofing system has been around for many years. Architectural Cladding Suppliers offer the original standing seam system with traditional detailing, giving an aesthetically pleasing finish whilst avoiding the industrial finishes found in more recent standing seam systems.

One of the most versatile cladding systems available, whether it is for roofing or facade type applications. The Standing Seam Cladding and Roofing system requires two panel seams to lap each other. Each panel is secured with our concealed clips and then crimped securely together with the use of specialised tools.

The Standing Seam Cladding and Roofing system is the most versatile cladding profile lending itself to all flat, curved, concave, convex, conical and domed applications. This is a cost effective system with a material selection possible for every project budget.


Standing Seam Cladding & Roofing Material Availability:

- VM Zinc, Rheinzink, Jarden Zinc 0.7mm BMT.
- 0.55mm BMT COLORBOND® steel, ZINCALUME® steel, Metallic, Ultra.
- 0.7mm BMT Copper.
- 0.7mm BMT Aluminium.



General Requirements:

- Consist of continuous wall studs or Top hats at max 600mm spacing.
- Plywood 17mm structural to as 2269.
- Fully breathable, waterproofed membrane.
- Fix standing seam clips at max. 300mm centres.

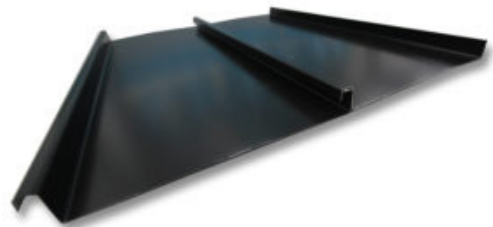

www.acladding.com.au

Architectural Cladding Suppliers

Factory 1 / 3 Concord Cres,
Carrum Downs Vic 3201

PO Box 688
Patterson Lakes Vic 3201

Phone: 03 9775 1097
Email: admin@acladding.com.au
Web: www.acladding.com.au



Standing Seam Cladding and Roofing Data Sheet

Profile Dimensions

The Standing Seam Cladding and Roofing system is one of the simplest metal cladding and roofing products to use when challenged with multiple windows, doors and complex architectural shapes. The detailed arrangements required to integrate from flashing to panel can be made quickly and with no fuss by choosing our Standing Seam Cladding and Roofing system.

The Standing Seam Panels are roll-formed and can be modified to suit between windows and door ways. Architectural Cladding Suppliers provide you with a unique ability to tailor your cladding and roofing materials to suit your project specifications and needs.

Standing Seam Cladding & Roofing Formats: 25mm / 38mm / 50mm

Seams are available in 25mm / 38mm / 50mm formats, in copper, brass, bronze, zinc, stainless steel or pre-coated aluminium and can be supplied with all the necessary traditional flashings and accessories. The streamline low height of the seams (25mm and 38mm) contributes to its architectural design and offers you the flexibility when working on more complex designs and structures. Also available in 50mm creating large shadow lines for a beautiful aesthetic and stronger clips for durability. Substrate is optional with the 50mm format.

Features:

- Material options: COLORBOND® steel, ZINCALUME® steel, Metallic, Ultra, VM Zinc, BMT Copper and Aluminium.
- Waterproof with all details and panel connections.
- Lends itself to all flat, curved, concave, convex and conical domed applications.

Benefits:

- Minimal wastage of materials - low cost.
- Infinite design options - great choice for continuous cladding of long panels.
- Incredible flexibility and versatility - allows for creative design and architecture.


Double Turn Up 25 mm

Profile Dimensions



Double Turn Up 38 mm (1 1/2")

Profile Dimensions

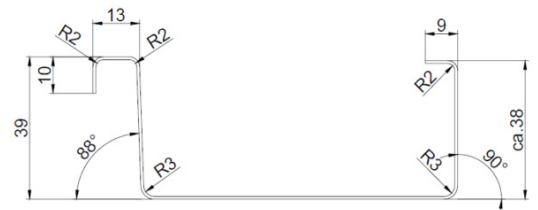

www.acladding.com.au

Architectural Cladding Suppliers

Factory 1 / 3 Concord Cres,
Carrum Downs Vic 3201

PO Box 688
Patterson Lakes Vic 3202

Phone: 03 9775 1097
Email: admin@acladding.com.au
Web: www.acladding.com.au

