

## Product Highlights

- Non-combustible metal cladding and roofing profile, our recommendation is for Nailstrip to be used as wall cladding only.
- Versatile design and install options available
- Defined finish with concealed fixings
- Fast and effective installation method

## Product Specifications

<b>Rib Heights Available</b>	25mm and 38mm rib heights available
<b>Length of Panel</b>	Panel lengths available from a minimum 500mm, dependant on material selection recommended maximum 4000mm *
<b>Cover Widths Available</b>	165mm – 490mm pan widths from rib to rib (material dependant)
<b>Substrate Requirements</b>	Substrate options available for wall and roof applications *
<b>Tolerance (mm)</b>	Sheet length: +/- 7mm Covering width: +/- 7mm
<b>Stop End and/or Hook</b>	Recommended by ACS
<b>Fire Rated/BAL Applications</b>	Suitable for use in fire rated and BAL applications in conjunction with a suitable wall/roof build up*

\* Note: For further information and expert advice please contact Architectural Cladding Suppliers.


# Nailstrip

## Brands

COLORBOND® steel  
GALVABOND® steel  
ZINCALUME® steel  
Unicote®, Unicote® Lux  
MagnaFlow, ColorCote® & UniZinc™

## Metals

Steel, Weathering Steel, Galvanised Steel, Stainless Steel

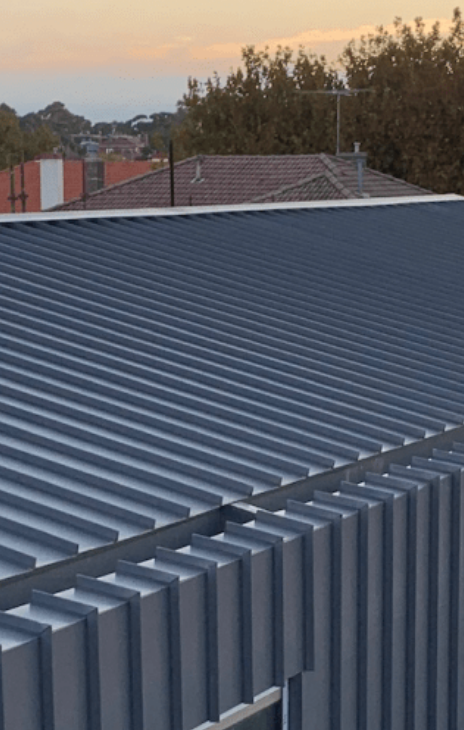

# Key Benefits


- Suited for residential and commercial building.
- Simple installation method with no specialist tools required.
- Custom pan widths available to suit design requirements.
- Minimal maintenance compared to other building materials.
- Sophisticated and clean aesthetic with no visible fixings.
- Can be applied to a curved wall application.
- Ability to taper panels.
- Versatile design and install options available.
- Allows for building expansion and contraction.

## Technical Support

- Architectural Cladding Suppliers are here to help you. We can manufacture and provide everything that is required to complete your project from our cladding profiles, to all the associated accessories and flashings via our sister company, PPC Flashings. For further information or support with flashings please contact the PPC Flashings team.
- As every architectural project is different, if you require custom advice, we can discuss your project specifications and will work with you to fabricate to your individual requirements. For any further technical support please contact Architectural Cladding Suppliers.

## Installation

- Architectural Cladding Suppliers cannot guarantee that your metal panels will not experience the effects of what is commonly referred to as oil canning. Oil canning can occur on all types of metal and is not considered a panel defect. For more information please refer to our [website article on oil canning](#).
- We recommend installing a "breathable vapour" membrane to act as a second line of defence to stop any water ingress as well as allowing the building to "breathe". Any flashings required can be sourced via PPC Flashings.
- Stop ends and/or hooks to each panel are highly recommended by Architectural Cladding Suppliers. If you are unsure, please contact us prior to ordering.
- It is recommended that the fixing point starts in the centre of the Nailstrip panel.
- Architectural Cladding Suppliers recommend that any of our cladding products are installed by a qualified and experienced cladding installer for best results. Do not continue if the installation does not seem right, contact Architectural Cladding Suppliers.

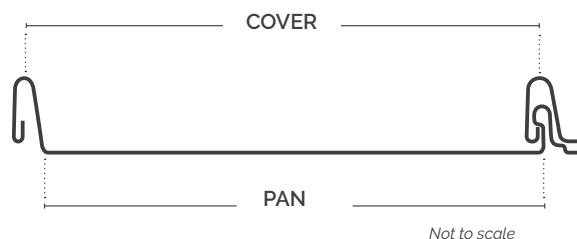

### GENERAL DISCLAIMER:

*Our ACS datasheet is to be used as a guide only and for further technical support or advice, please contact our cladding team, prior to placing your order or any installation works.*



**Web:** [www.acladding.com.au](http://www.acladding.com.au)  
**Email:** [admin@acladding.com.au](mailto:admin@acladding.com.au)  
**Phone:** 03 9775 1097  
**Address:** 4 / 7 Silkwood Rise,  
Carrum Downs, Victoria 3201

